

Auxiliary-powered Sailplane Association

Published Bi-Monthly by ASA Inc. - Stan Nelson, President - Bruce Templeton, Vice President - Issue #49 Vol.VIII


MAY-JUNE 1996 NEWSLETTER



NOTES FROM THE PRESIDENT

"SUN-N-FUN" --- Those of you who missed "Sun-n-Fun" '96 at Lakeland Florida in April missed a super show of the latest in general aviation, homebuilt, ultralight, hanglider, warbird engine and avionics, etc. development. Of particular interest to the ASA was the showing of the new SUPER VIVAT L13 Two Seat Motorglider by Moravia and distributed by Solaire North American LTD. (803-689-5251), the new Katana Xtreme HK36R distributed by Solaire North America LTD. marketed by Diamond aircraft, (1-800-268-4001), the CUMULUS Ultralight Motorglider by US Aviation (612-450-0930) and another ultralite, the Mini Straton D-7 by Aero Dovron, Inc. (407-747-6705).

The CUMULUS is featured in this issue and the others will be covered in the future.

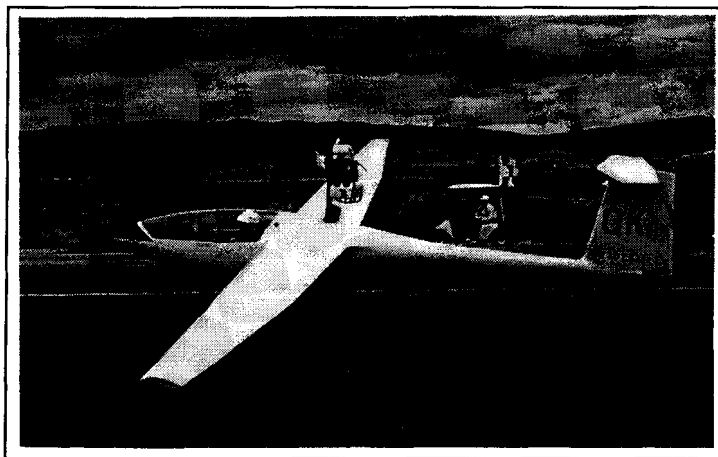

Bud Schurmeier at Minden

the Cumulus and Swift, motor gliders such as Grobs, Taifuns and Ximangos, sustainers and self-launchers. Classes and handicaps would have to be established with the objective being to introduce pilots to the fun and spirit of competition soaring. Each class could have tasks compatible with the capabilities of the designs with many close-in turn points. By requiring the use of "Data Loggers" such as the Cambridge, the start gate, finish gate and altitude window could be eliminated, simplifying contest management and scoring. Please send your comments on this concept to the President, ASA.

TAOS SOARING CAMP --- The Texas soaring fraternity descended on Taos in early June for a great week of soaring and evening activities. An interesting insight into the change in the make-up of soaring was the fact that 12 of the total of 20 gliders were aux-powered. Three Stemme S-10s were there one day along with the designer of

the S-10, Dr. Reiner Stemme. Some of the aux-powered attendees were Stan Nelson, Ventus CM, Bud Schurmeier, PIK30, Bob Saxton, S-10 and Discus BM, Steele Lipe, DG600M, Jack McKenney, PIK20, Bernie Gross and Rick Howell, Ventus CT, Eric Greenwell, ASH26E and Dick Mockler in a Ventus CT. Between the social activities and great soaring a fabulous time was had by all. We thank the gracious hospitality of the Texas group for inviting a limited number of guests and to Steve Stanton, Airport Manager, for somehow finding room for everyone despite a field crowded with fire fighting helicopters who were busy with the fires plaguing New Mexico at that time.

AUX-POWERED U. S. NATIONALS. --- The National Soaring Foundation of Hobbs, New Mexico sponsored the Aux-Powered U. S. Nationals in conjunction with the Open and Sports Class Nationals. The contest was held at Hobbs, site of many regional and national contests and the 1983 World Soaring Championships. There were fifteen contestants, the largest field yet with two new excellent pilots joining the group, Dick Mockler and Phil Ecklund with their Ventus turbo's. The contest began with excellent, but very hot weather and continued for six contest days. Cloud bases were above 13,000 ft. MSL with two days exceeding 15,000 ft. Raw speeds were in the high 70's. Rick Howell was first in his Ventus BT followed by Eric Greenwell in his ASH26E. Complete results are in this issue.

ASA SPONSORED AUX-POWERED CONTEST --- The ASA could sponsor an Aux-powered Sports Class Regional in which all manner of aux-powered gliders could be invited. It could include ultralights such as

CONTEST FLYING IN AN AUX-POWERED SAILPLANE

Contest flying in an aux-powered sailplane can be a ball. With an aux-powered sailplane you almost never have a land-out and suffer the long and exhausting retrieve for you and your crew. You also don't miss the great cocktail parties and barbecues and you fly with a great bunch of friendly and helpful guys. Even if you aren't an all out competitive type, it is a good way to challenge yourself in cross-country flying that you probably wouldn't do by yourself. There are both Regional and National SSA sanctioned contests open to aux-powered sailplanes.

In Regional competitions you may fly in the regular unpowered classes; 15 Meter, Standard, Open and Sports as well as in a separate Aux-powered class if there are sufficient entries. At the National level, you may fly in the Sports Class or the Aux-powered Nationals. The rules for the use of the engine and the scoring for the FAI and Sports classes differ from those for the Aux-powered class.

In the Aux-powered Class you may use the engine for self-launch as well as to help you out of a hole and allow you to continue the task. If you do not use the engine during the task, you receive both speed and distance points. If you use the engine to complete the task, you lose all speed points and your distance points are reduced in proportion to the amount of engine use. You must carry a barograph that records engine use.

In the FAI and Sports Classes you may not use the engine for self-launch and if you do not use the engine during the task you receive both speed and distance points. If you start the engine during the task, the task is terminated and you are scored as if you had landed at the last validated turn point. The engine is sealed with an easily breakable seal prior to launch and you must carry equipment showing the time the engine was started relative to turn point times to receive distance credit to the last turn point. You may also land out and then use the engine to self-retrieve. If you have a landing witness verifying that the engine seal was unbroken when you landed and your equipment shows that the engine was not used until after the land-out, you will receive distance credit to the land-out point.

Submitted by Bud Schurmeier - Competition Rules

DG-400 CHECKLIST

Rudy Alleman sent the following :

Here's an item to add to your DG-400 checklist: See

that the engine retract breaker is in before takeoff, and check it in flight if the engine fails to retract.

This is what happened to me. I assembled and raised the engine and inspected it according to the routine, but I didn't notice that I had held the raise switch a bit too long and popped the breaker. After takeoff and engine shutdown the engine would not retract. I thought the problem was propeller alignment and tried several more times before giving up and landing with the engine in the raised position. On the ground I noticed that the breaker was popped. The next several flights have been without incident. I have added this to my pre-engine start/takeoff checklist, since this sequence is not brought forth in the DG-400 manual.


MOTORGLIDER NATIONALS RESULTS

Rank	Name	Plane	Points
1	Howell	Ventus BT	5200
2	Greenwell	ASH26E	5182
3	Pollard	ASH26E	4782
4	Nelsen	Ventus CM	4769
5	Estrada	ASH26E	4718
6	Aitken	DG400	4515
7	Dyer-Bennet	DG500M	4507
8	Mockler	Ventus CT	4385
9	Volkman	DG800m	4380
10	Perkins	Ventus CM	4243
11	Shilen	DG800B	4225
12	Barritt	DG500M	4154
13	Ecklund	Ventus BT	3691
14	Martini	Nimbus 3DM	3639
15	Walsh	Ventus CM	3419

CROSS-WIND TAKEOFF AND LANDING RETRACTABLE ENGINE SHIPS

None of us look forward to a takeoff or landing in cross-wind conditions. Usually the wind is varying in direction and velocity. Add "ground effect" which increases the tendency to float and you have a potentially dangerous situation. The following suggestions are not meant to supersede the handbook instructions which should be observed for the particular model you are flying. Be sure and check the handbook for the maximum Allowable cross-wind component.

Takeoff: (self-launch)

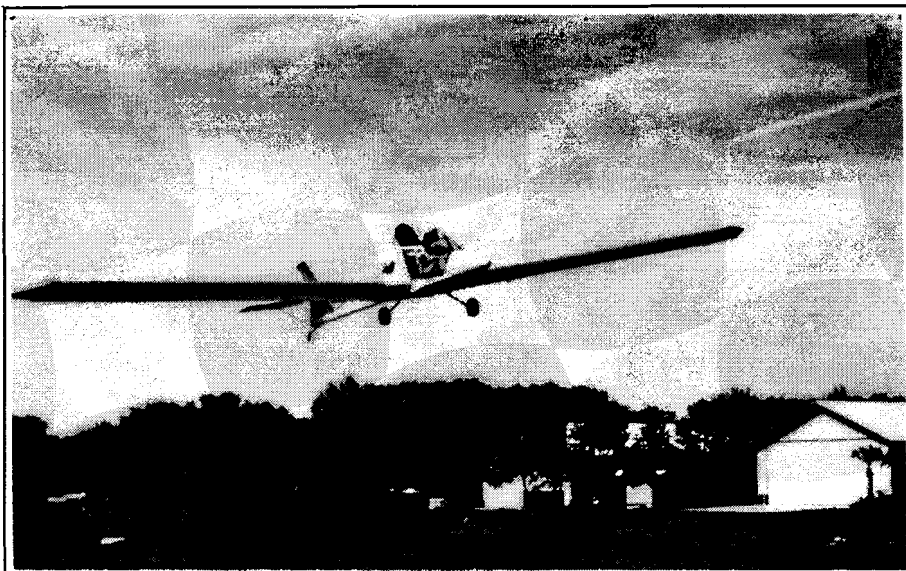

THE CUMULUS
An Ultralite Motorglider Kit

A new motorglider made it's appearance at Sun and Fun. It is an impressive design that should have good soaring and power performance providing a good way to enjoy soaring at a modest cost.

The clean design with a low wing loading, high aspect ratio cantilever wing with spoilers and flaps should provide good control and thermalling performance. Adequate power and a good landing gear will make self-launch practical.

The CUMULUS is powered by a AMW/Cuyuna 35 horsepower, twin cylinder engine with gear reduction drive and electric starter. The engine, muffler and BRS parachute are fully cowled under a fiberglass skin, preserving a clean exterior. A fully enclosed cockpit version, which should have improved performance, will be available later this year.

It is only available in kit form with construction time estimated at about 150 hours. Kit features such as a fully welded fuselage and tail, pre-made spars, formed ailerons and ribs and ready to finish fuselage fairing simplify construction.

DIMENSIONS

Wing span * 43 ft
Wing area * 141 sq ft
Aspect ratio * 13.1:1
Empty weight * 320 lbs
Gross weight * 560 lbs

SPEEDS

Max speed * 85 mph
Econ cruise * 60 mph-1.5 gph
Stall (flaps) * 27 mph

PERFORMANCE

Min. sink * 190 fpm
 @ 34 mph
Max. L/D * 20:1 @ 43 mph
Rate of climb * 1000 fpm
Range * 200 mi w/o lift
Takeoff * 170 ft
Roll rate * 3.5 sec (45-45)

STRUCTURE

Limit load * +4.4/-2.0 G
F./S. * 1.5 X limit load
Wing and tail *. Fabric covered
Airframe * 6061-T6 al. and
 4130 steel
Wing loading * 3.97 lbs/sq ft
Fuel Capacity * 5 gal.

For added information, contact:
US Aviation
265 Echo Lane
South St. Paul, MN 55075
tel/fax: 612/450-0930

Notes from the editor

We would like to add a new feature to our newsletter -- a "Letters to the Editor" section. Please keep them concise and brief and we reserve the right to edit them if necessary while still retaining the intent of the letter.

In the January-February letter we added a comment following a reprint of an article from the British publication "SAILPLANE and GLIDING" regarding contest rules for retrieval. We incorrectly implied that our contest rules, approved by the SSA, prohibited self-launch retrieval. That was incorrect and we've included an article by Bud Schurmeier, the ASA contest rules representative, which clarifies the present situation. We hope this article will prompt some discussion regarding changes and additions to the rules which will improve the status of auxiliary-powered gliders in competition.

Corrections

The Auxiliary-Powered Sailplane information sheet included with the January-February newsletter listed some data which Geolard Waibel of AS requested we correct. The correct data are:

Alt/Gen are included on the ASW-24E, ASW-22BE and ASH-25E.
The ASH-25E engine is a ROTAX 275 and the performance on the ASH-26E is 581' take-off and 1116' over a 50 ft. obstacle.

Geolard Waibel

